


XGQT08 Adaptor Flange PN16

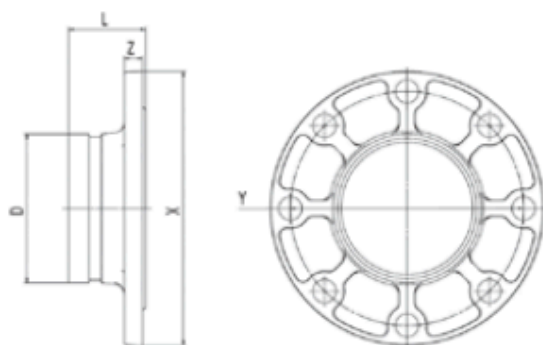

Nominal Size mm/in	Pipe O.D mm/in	Working Pressure PSI/MPa	Dimension				Bolt/Nut
			L	X	Y	Z	
			mm/in	mm/in	mm/in	mm/in	
50	60.3	232	67	164	125	17	4-M16
2	2.375	1.6	2.638	6.457	4.921	0.669	
65	73	232	65	184	145	17	4-M16
2 1/2	2.875	1.6	2.559	7.244	5.709	0.669	
65	76.1	232	65	184	145	16	4-M16
3OD	3	1.6	2.559	7.244	5.709	0.630	
80	88.9	232	65	200	160	17	8-M16
3	3.5	1.6	2.559	7.874	6.299	0.669	
100	108	232	63	210	180	15	8-M16
4 1/4 OD	4.25	1.6	2.480	8.268	7.087	0.591	
100	114.3	232	70	219	180	17	8-M16
4	4.5	1.6	2.756	8.622	7.087	0.669	
125	133	232	70	250	210	18	8-M16
5 1/4 OD	5.25	1.6	2.756	9.843	8.268	0.709	
125	139.7	232	70	250	210	18	8-M16
5 1/2 OD	5.5	1.6	2.756	9.843	8.268	0.709	
125	141.3	232	70	250	210	18	8-M16
5	5.563	1.6	2.756	9.843	8.268	0.709	
150	159	232	70	285	240	18	8-M20
6 1/4 OD	6.25	1.6	2.756	11.220	9.449	0.709	
150	165.1	232	70	286	240	18	8-M20
6 1/2 OD	6.5	1.6	2.756	11.260	9.449	0.709	
150	168.3	232	70	285	240	18	8-M20
6	6.625	1.6	2.756	11.220	9.449	0.709	
200	219.1	232	80	341	295	19	12-M20
8	8.625	1.6	3.150	13.425	11.614	0.748	
250	273	232	78	402	355	22	12-M24
10	10.75	1.6	3.071	15.827	13.976	0.866	
300	323.9	232	90	450	410	25	12-M24
12	12.75	1.6	3.543	17.717	16.142	0.984	