


XGQT07

Grooved

Concentric Reducer

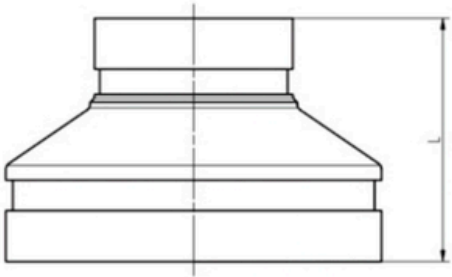

Nominal Size mm/in	Pipe O.D mm/in	Working Pressure PSI/MPa	Dimension n L mm/in
32 × 25 1 1/4 × 1	42.4 × 33.7 1.660 × 1.315	300 2.07	64 2.520
40 × 25 1 1/2 × 1	48.3 × 33.7 1.900 × 1.315	300 2.07	64 2.520
40 × 32 1 1/2 × 1 1/4	48.3 × 42.4 1.900 × 1.660	300 2.07	64 2.520
50 × 32 2 × 1 1/4	60.3 × 42.4 2.375 × 1.660	300 2.07	64 2.520
50 × 40 2 × 1 1/2	60.3 × 48.3 2.375 × 1.900	300 2.07	64 2.520
65 × 25 2 1/2 × 1	73.0 × 33.7 2.875 × 1.315	300 2.07	64 2.520
65 × 32 2 1/2 × 1 1/4	73.0 × 42.4 2.875 × 1.660	300 2.07	64 2.520
65 × 40 2 1/2 × 1 1/2	73.0 × 48.3 2.875 × 1.900	300 2.07	64 2.520
65 × 50 2 1/2 × 2	73.0 × 60.3 2.875 × 2.375	300 2.07	64 2.520
65 × 25 3OD × 1	76.1 × 33.7 3.000 × 1.315	300 2.07	64 2.520
65 × 32 3OD × 1 1/4	76.1 × 42.4 3.000 × 1.660	300 2.07	64 2.520
65 × 40 3OD × 1 1/2	76.1 × 48.3 3.000 × 1.900	300 2.07	64 2.520
65 × 50 3OD × 2	76.1 × 60.3 3.000 × 2.375	300 2.07	64 2.520
80 × 25 3 × 1	88.9 × 33.7 3.500 × 1.315	300 2.07	64 2.520
80 × 32 3 × 1 1/4	88.9 × 42.4 3.500 × 1.660	300 2.07	64 2.520
80 × 40 3 × 1 1/2	88.9 × 48.3 3.500 × 1.900	300 2.07	64 2.520
80 × 50 3 × 2	88.9 × 60.3 3.500 × 2.375	300 2.07	64 2.520
80 × 65 3 × 2 1/2	88.9 × 73.0 3.500 × 2.875	300 2.07	64 2.520
80 × 65 3 × 3OD	88.9 × 76.1 3.500 × 3.000	300 2.07	64 2.520
100 × 25 4 1/4OD × 1	108.0 × 33.7 4.250 × 1.315	300 2.07	76 2.992
100 × 32 4 1/4OD × 1 1/4	108.0 × 42.4 4.250 × 1.660	300 2.07	76 2.992
100 × 40 4 1/4OD × 1 1/2	108.0 × 48.3 4.250 × 1.900	300 2.07	76 2.992
100 × 50 4 1/4OD × 2	108.0 × 60.3 4.250 × 2.375	300 2.07	76 2.992
100 × 65 4 1/4OD × 2 1/2	108.0 × 73.0 4.250 × 2.875	300 2.07	76 2.992
100 × 65 4 1/4OD × 3OD	108.0 × 76.1 4.250 × 3.000	300 2.07	76 2.992
100 × 80 4 1/4OD × 3	108.0 × 88.9 4.250 × 3.500	300 2.07	76 2.992
100 × 25 4 × 1	114.3 × 33.7 4.500 × 1.315	300 2.07	78 3.071
100 × 32 4 × 1 1/4	114.3 × 42.4 4.500 × 1.660	300 2.07	78 3.071
100 × 40 4 × 1 1/2	114.3 × 48.3 4.500 × 1.900	300 2.07	78 3.071
100 × 50 4 × 2	114.3 × 60.3 4.500 × 2.375	300 2.07	78 3.071
100 × 65 4 × 2 1/2	114.3 × 70.3 4.500 × 2.875	300 2.07	78 3.071
100 × 65 4 × 3OD	114.3 × 76.1 4.500 × 3.000	300 2.07	78 3.071
100 × 80 4 × 3	114.3 × 88.9 4.500 × 3.500	300 2.07	78 3.071
125 × 25 5 1/2OD × 1	139.7 × 33.7 5.500 × 1.315	300 2.07	89 3.504

Nominal Size mm/in	Pipe O.D mm/in	Working Pressure PSI/MPa	Dimension n L mm/in
125 × 32 5 1/2OD × 1 1/4	139.7 × 42.4 5.500 × 1.660	300 2.07	89 3.504
125 × 40 5 1/2OD × 1 1/2	139.7 × 48.3 5.500 × 1.900	300 2.07	89 3.504
125 × 50 5 1/2OD × 2	139.7 × 60.3 5.500 × 2.375	300 2.07	89 3.504
125 × 65 5 1/2OD × 2 1/2	139.7 × 73.0 5.500 × 2.875	300 2.07	89 3.504
125 × 65 5 1/2OD × 3OD	139.7 × 76.1 5.500 × 3.000	300 2.07	89 3.504
125 × 80 5 1/2OD × 3	139.7 × 88.9 5.500 × 3.500	300 2.07	89 3.504
125 × 100 5 1/2OD × 4 1/4OD	139.7 × 108.0 5.500 × 4.250	300 2.07	89 3.504
125 × 100 5 1/2OD × 4	139.7 × 114.3 5.500 × 4.500	300 2.07	89 3.504
125 × 25 5 × 1	141.3 × 33.7 5.563 × 1.315	300 2.07	89 3.504
125 × 32 5 × 1 1/4	141.3 × 42.4 5.563 × 1.660	300 2.07	89 3.504
125 × 40 5 × 1 1/2	141.3 × 48.3 5.563 × 1.900	300 2.07	89 3.504
125 × 50 5 × 2	141.3 × 60.3 5.563 × 2.375	300 2.07	89 3.504
125 × 65 5 × 2 1/2	141.3 × 73.0 5.563 × 2.875	300 2.07	89 3.504
125 × 65 5 × 3OD	141.3 × 76.1 5.563 × 3.000	300 2.07	89 3.504
125 × 80 5 × 3	141.3 × 88.9 5.563 × 3.500	300 2.07	89 3.504
125 × 100 5 × 4 1/4OD	141.3 × 108.0 5.563 × 4.250	300 2.07	89 3.504
125 × 100 5 × 4	141.3 × 114.3 5.563 × 4.500	300 2.07	89 3.504
150 × 25 6 1/4OD × 1	159.0 × 33.7 6.250 × 1.315	300 2.07	102 4.016
150 × 32 6 1/4OD × 1 1/4	159.0 × 42.4 6.250 × 1.660	300 2.07	102 4.016
150 × 40 6 1/4OD × 1 1/2	159.0 × 48.3 6.250 × 1.900	300 2.07	102 4.016
150 × 50 6 1/4OD × 2	159.0 × 60.3 6.250 × 2.375	300 2.07	102 4.016
150 × 65 6 1/4OD × 2 1/2	159.0 × 73.0 6.250 × 2.875	300 2.07	102 4.016
150 × 65 6 1/4OD × 76.1	159.0 × 76.1 6.250 × 3.000	300 2.07	102 4.016
150 × 80 6 1/4OD × 3	159.0 × 88.9 6.250 × 3.500	300 2.07	102 4.016
150 × 100 6 1/4OD × 4 1/4OD	159.0 × 108.0 6.250 × 4.250	300 2.07	102 4.016
150 × 100 6 1/4OD × 4	159.0 × 114.3 6.250 × 4.500	300 2.07	102 4.016
150 × 125 6 1/4D × 5 1/4OD	159.0 × 133.0 6.250 × 5.250	300 2.07	102 4.016
150 × 25 6 1/2OD × 1	165.1 × 33.7 6.500 × 1.315	300 2.07	102 4.016
150 × 32 6 1/2OD × 1 1/4	165.1 × 42.4 6.500 × 1.660	300 2.07	102 4.016
150 × 40 6 1/2OD × 1 1/2	165.1 × 48.3 6.500 × 1.900	300 2.07	102 4.016
150 × 50 6 1/2OD × 2	165.1 × 60.3 6.500 × 2.375	300 2.07	102 4.016
150 × 65 6 1/2OD × 2 1/2	165.1 × 73.0 6.500 × 2.875	300 2.07	102 4.016
150 × 65 6 1/2OD × 3OD	165.1 × 76.1 6.500 × 3.000	300 2.07	102 4.016
150 × 80 6 1/2OD × 3	165.1 × 88.9 6.500 × 3.500	300 2.07	102 4.016

Nominal Size mm/in	Pipe O.D mm/in	Working Pressure PSI/MPa	Dimension n L mm/in
150 × 100 6 1/2OD × 4 1/4 OD	165.1 × 108.0 6.500 × 4.250	300 2.07	102 4.016
150 × 100 6 1/2OD × 4	165.1 × 114.3 6.500 × 4.500	300 2.07	102 4.016
150 × 125 6 1/2OD × 5 1/4OD	165.1 × 133.0 6.500 × 5.250	300 2.07	102 4.016
150 × 125 6 1/2OD × 5 1/2OD	165.1 × 139.7 6.500 × 5.500	300 2.07	102 4.016
150 × 125 6 1/2OD × 5	165.1 × 141.3 6.500 × 5.563	300 2.07	102 4.016
150 × 25 6 × 1	168.3 × 33.7 6.625 × 1.315	300 2.07	102 4.016
150 × 32 6 × 1 1/4	168.3 × 42.4 6.625 × 1.660	300 2.07	102 4.016
150 × 40 6 × 1 1/2	168.3 × 48.3 6.625 × 1.900	300 2.07	102 4.016
150 × 50 6 × 2	168.3 × 60.3 6.625 × 2.375	300 2.07	102 4.016
150 × 65 6 × 2 1/2	168.3 × 73.0 6.625 × 2.875	300 2.07	102 4.016
150 × 65 6 × 3OD	168.3 × 76.1 6.625 × 3.000	300 2.07	102 4.016
150 × 80 6 × 3	168.3 × 88.9 6.625 × 3.500	300 2.07	104 4.094
150 × 100 6 × 4 1/4OD	168.3 × 108.0 6.625 × 4.25	300 2.07	104 4.094
150 × 100 6 × 4	168.3 × 114.3 6.625 × 4.500	300 2.07	104 4.094
150 × 125 6 × 5 1/4OD	168.3 × 133.0 6.625 × 5.250	300 2.07	104 4.094
150 × 125 6 × 5 1/2OD	168.3 × 139.7 6.625 × 5.500	300 2.07	104 4.094
150 × 125 6 × 5	168.3 × 141.3 6.625 × 5.563	300 2.07	104 4.094
200 × 65 8 × 2 1/2	219.1 × 73.0 8.625 × 2.875	300 2.07	127 5.000
200 × 65 8 × 3OD	219.1 × 76.1 8.625 × 3.000	300 2.07	127 5.000
200 × 80 8 × 3	219.1 × 88.9 8.625 × 3.500	300 2.07	127 5.000
200 × 100 8 × 4 1/4OD	219.1 × 108.0 8.625 × 4.250	300 2.07	127 5.000
200 × 100 8 × 4	219.1 × 114.3 8.625 × 4.500	300 2.07	127 5.000
200 × 125 8 × 5 1/4OD	219.1 × 133.0 8.625 × 5.250	300 2.07	127 5.000
200 × 125 8 × 5 1/2OD	219.1 × 139.7 8.625 × 5.500	300 2.07	127 5.000
200 × 125 8 × 5	219.1 × 141.3 8.625 × 5.563	300 2.07	127 5.000
200 × 150 8 × 6 1/4OD	219.1 × 159.0 8.625 × 6.250	300 2.07	127 5.000
200 × 150 8 × 6 1/2OD	219.1 × 165.1 8.625 × 6.500	300 2.07	127 5.000
200 × 150 8 × 6	219.1 × 168.3 8.625 × 6.625	300 2.07	127 5.000
250 × 125 10 × 5	273 × 141.3 10.75 × 5.563	300 2.07	125 4.921
250 × 150 10 × 6	273 × 168.3 10.75 × 6.625	300 2.07	152 5.984
250 × 200 10 × 8	273 × 219 10.75 × 8.625	300 2.07	152 5.984